


iT4S

Standard thermal transfer desktop
barcode printer with
300-meter ribbon supported

iDPRT



- Standard thermal transfer desktop barcode printer with 300-meter ribbon supported.
- The modular design of print head makes the disassembly and assembly easy.
- With the function to automatically identify the printer head with 203 dpi and 300 dpi and automatically configure the printer without PC settings.
- With super large storage, DDR2 RAM 128 MB, Flash 256 MB.
- With free label editing software Bartender to make the label editing convenient and easy.
- With various media to meet the demand of wide area.
- Refined white housing with printer mechanism, stable and durable.

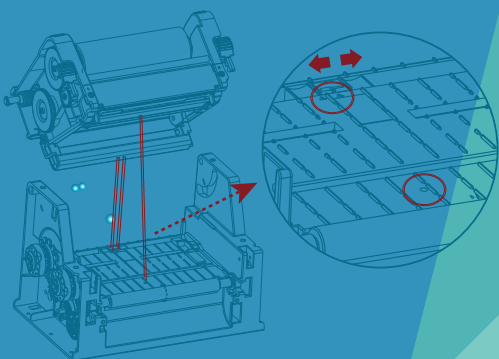

Model		IT4S
Print spec	Printing Method Resolution Max. Printing Speed Max. Printing Width Printing Length Protocol	Thermal transfer 203 dpi / 300 dpi 5 ips(203 dpi) / 4 ips(300 dpi) 108 mm(203 dpi) / 106 mm(300 dpi) 2286 mm(203 dpi) / 1524 mm(300 dpi) Compatible ZPL-II, EPL2, DPL, TSPL
Media	Width Thickness Roll	25.4 mm ~ 118 mm 60 μm ~ 250 μm 127 mm
Ribbon spec	Type Width Inradius Max.Length	Wax, Wax/Resin, Resin 30 mm ~ 110 mm 25.4 mm 300 m
Font	Resident Fonts Download Fonts	Alphanumeric, simplified Chinese, traditional Chinese, 29 international character sets Support
Barcode	Linear 2D	UPC-A, UPC-E, EAN128, Codabar, CODE128, CODE39, CODE93, EAN-8, EAN-13, UCC/EAN128, POSTNET, ITF14, HIBC, MSI, Plessey, Telepen, FIM, GS1 DataBar, German Post Code, Planet 11 & 13, Japanese Postnet, Interleaved 2 of 5, Standard 2 of 5, Industrial 2 of 5, Logmars, CODE11 CODE49, CODABLOCK, PDF417, Data Matrix, Maxicode, QR Code, MicroPDF471, Aztec
Sensor	Gap Sensor Black mark Sensor Other	Transmissive (Fixed, Dual) Reflective (Adjustable, Full-Range) Paper out detect, Ribbon out detect, Printerhead open detection, Print head temperature detect
Interfaces	Standard Optional	USB Type B, Ethernet Wi-Fi and Bluetooth
Memory	RAM Flash	128 MB 256 MB
Electrical	Input Output	AC 100~240 V, 50/60 Hz DC 24 V, 2A
Environmental	Memory Operation	5°C ~ 50 °C, humidity 25% ~ 85%, non-condensing -40°C ~ 60 °C, humidity 10% ~ 90%, non-condensing
Software	Driver Label Design Software	Windows 7/8/8.1/10, Windows Server 2008/2012/2016, Linux, MacOS BarTender 2019 UltraLite
Options & Accessory		T4P External label Peeler Module, T4GC External Cutter Module, External Label Roll Holder
Dimension (L×W×H mm)		293×237×180
Weight (Kg)		2.8
Agency Approval		CE EMC(EN 55022 Class B), FCC EMC(Class A), CCC, RoHS

